


KHS Bicycle Geometry

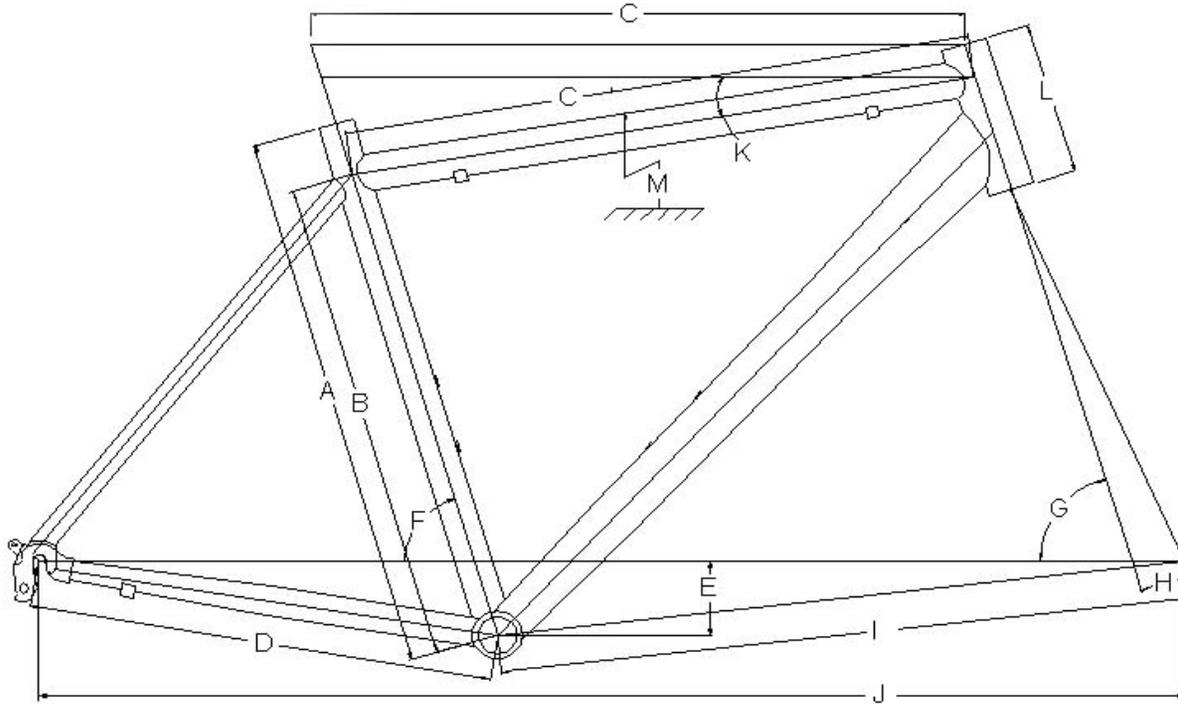

MODEL	FRAME SIZE		A	B	C	C'	D	E	F	G	H	I	J	K	L	M	Ø
	nominal	actual c-t"	s/t c-t	s/t c-c	t/t	t/t'	c/s	drop	s/t°	h/t°	rake	fc	wb	t/t°	h/t L	s.o.	s/t ID
AM 2000 AM 1000	S	16.5"	420	370	565	546	430	18	74	68.5	39	678	1107	23.2	120	81.4	31.6
	M	17.5"	445	420	585	572	430	18	74	68.5	39	703	1133	19.7	120	82.3	31.6
	L	16.5"	420	470	605	597	430	18	74	68.5	39	730	1159	15.8	140	85.3	31.6
DJ 300	S	13.6"	345	270	548.3	537.3	420	15	71.3	67.2	39	631.7	1051.25	32.4	115		30.0
	M	15.1"	383	308	572.7	551.8	420	15	71.3	67.2	39	656.4	1075.96	28.5	120	758	30.0
	L	16.5"	420	345	593.4	567	420	15	71.3	67.2	39	667.9	1097.47	23.9	130	783	30.0
DJ 200 DJ 50	S	13.6"	345	270	548.3	537.3	420	15	71.3	67.2	39	631.7	1051.25	32.4	115	746	30.0
	M	15.1"	383	308	572.7	551.8	420	15	71.3	67.2	39	656.4	1075.96	28.5	120	769	30.0
	L	16.5"	420	345	593.4	567	420	15	71.3	67.2	39	677.9	1097.47	23.9	130	784	30.0